



DISCOVER



A UNIQUE DEVICE

A flexible multi-output detector with unique features and performances capable to detect the most requested gases in the market.

WHO WE ARE


GVZ Components is a leading supplier for EMEA sensors' market with more than 40 years experience, providing the industry with gas, temperature and pressure sensors, oxygen, hydrogen, particle , radon, gamma and X-ray sensors, contactors, high voltage relays, fuses, pressure and temperature switches, blind spot monitoring systems for heavy duty vehicles, position sensors, encoders and more.



Via Magenta, 77/16A - 20017 Rho (MI) - Italy
E-mail: info@gvzcomp.it
Telefono: +39 02 3340 0846



for Refrigerant and Flammable Gas Leakage Detection

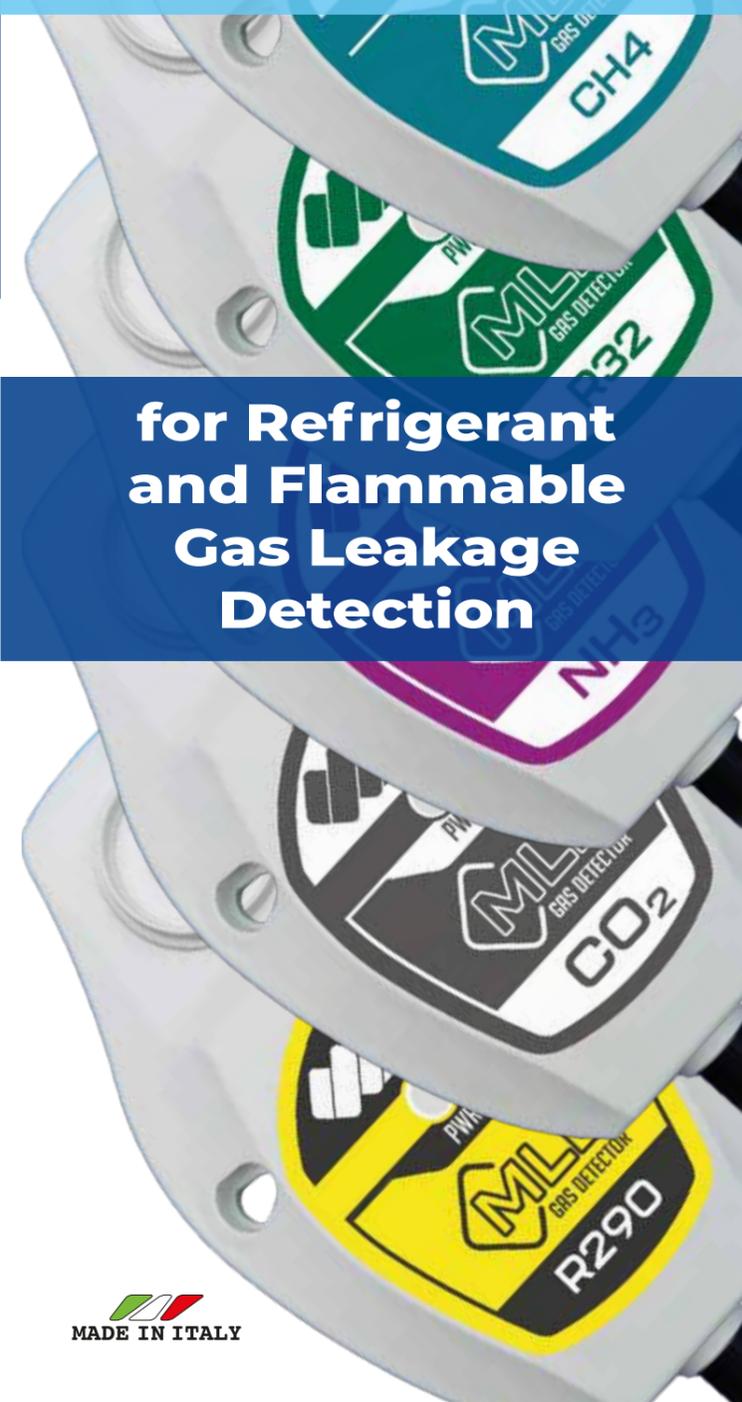

MADE IN ITALY

INNOVATION FIRST

GVZ DETECTOR PLATFORM

The MLD - **Molecular Leakage Detector** - series is our base platform for developing reliable and durable fixed gas detectors for professional use in industry leading applications such as HVAC-R, Oil&Gas and Fuel Cell.

We tested and selected the best in class sensing technologies to offer easy to install solutions specifically tailored to target gas leakage in accordance with the latest regulations. Modbus communication as well as alarm triggers via relays are the basic output of the MLD platform. Analogue output in current and voltage are also included in the unit.



**RELIABLE
LONG LIFE
NO CALIBRATION**



Your Sensing Solutions

MAIN FEATURES

- Available with 3 different sensing technologies inside: MPS, MOS, NDIR
- Multiple output: digital, analog & relays
- Full environmental compensation
- Poisoning resistant
- No calibration needed over life
- Autocalibration feature (NDIR)
- Operating life: > 15 years

REFRIGERANTS A1



- Available for R404A, R407C
- Coming soon (2024): R410A
- Outputs: Modbus, 2 analog and 2 relays
- Sensitivity 400-2500 ppm
- Working temperature -40° +75°C
- Temperature, humidity and pressure compensated
- ATEX certified and compliant with IEC60335-2-40
- Immune to poisoning
- IP65

REFRIGERANTS A2L



- Available for R32, R454B, R454C
- Coming soon (2024): R1234ze, R1234yf, R454A, R455A
- Outputs: Modbus, 2 analog and 2 relays
- Sensitivity 0-100% LEL
- Response time <30 sec.
- ATEX certified and compliant with IEC60335-2-40
- Immune to poisoning
- IP65

REFRIGERANTS A3



- Available for R290, R600, R600a, R170
- Outputs: Modbus, 2 analog and 2 relays
- Sensitivity 0-100% LEL
- Working temperature -40° +75°C
- Temperature, humidity and pressure compensated
- ATEX certified and compliant with IEC60335-2-40
- IP65

AMMONIA



- NH₃ gas detector (available 2024)
- Outputs: Modbus, 2 analog and 2 relays
- Sensitivity 0-100% LEL
- Response time <20 sec.
- Working temperature -40° +75°C
- ATEX certified and compliant with IEC60335-2-40
- Immune to poisoning
- IP65

METHANE



- CH₄ gas detector
- Outputs: Modbus, 2 analog and 2 relays
- Sensitivity 0-100% LEL
- Working temperature -40° +75°C
- Temperature, humidity and pressure compensated
- ATEX certified
- Immune to poisoning
- IP65

HYDROGEN



- H₂ gas detector
- Outputs: Modbus, 2 analog and 2 relays
- Sensitivity 0-100% LEL
- Working temperature -40° +75°C
- Temperature, humidity and pressure compensated
- ATEX certified
- Immune to poisoning
- IP65

CARBON DIOXIDE



- CO₂ gas detector (available 2024)
- Solid State LED NDIR technology
- Outputs: Modbus and 2 relays
- Sensitivity 0-5%, 0-20%, 0-60%
- Response time <30 sec.
- Sensor life span >15 years
- Working temperature -25° +55°C
- Vibration and shock resistant
- ATEX certified and compliant to IEC 60335-2-40
- IP65

REFRIGERANTS

FLAMMABLES

CO₂ CARBON DIOXIDE

NH₃ AMMONIA

H₂ HYDROGEN

“ MLD detector complies to IEC60335-2-40 standards and is an intrinsically safe device for ATEX zone 2 ”

